

VIBRATING SCREEN FOR CASTING SLIP


VBL 900 - 1200 - 1500 2/X

TECHNICAL FEATURES

DATA	U.M.	1500	1200	900
Number screening nets	no.	2		
Screening surface	m ²	1.575+1.575	0.932+0.932	0.587+0.587
Power	kW	2.75	1.25	0.73
Centrifugal force	N	21,582	12,753	6,867
Motorised vibrator	Type	MV 155/4	MV 145/4	MV 125/4
Weight	kg	300	170	125

STRUCTURAL FEATURES

- AISI 304 stainless steel base, with ABS inspection door
- Parts in contact with the product: AISI 304 L – roughness $\leq 0.5 \text{ Ra}_\mu$
- Protection rating: IP65
- Upper anti-splash strip
- Clamping system: half-rings with bolts
- Galvanised steel diffuser with PA cone

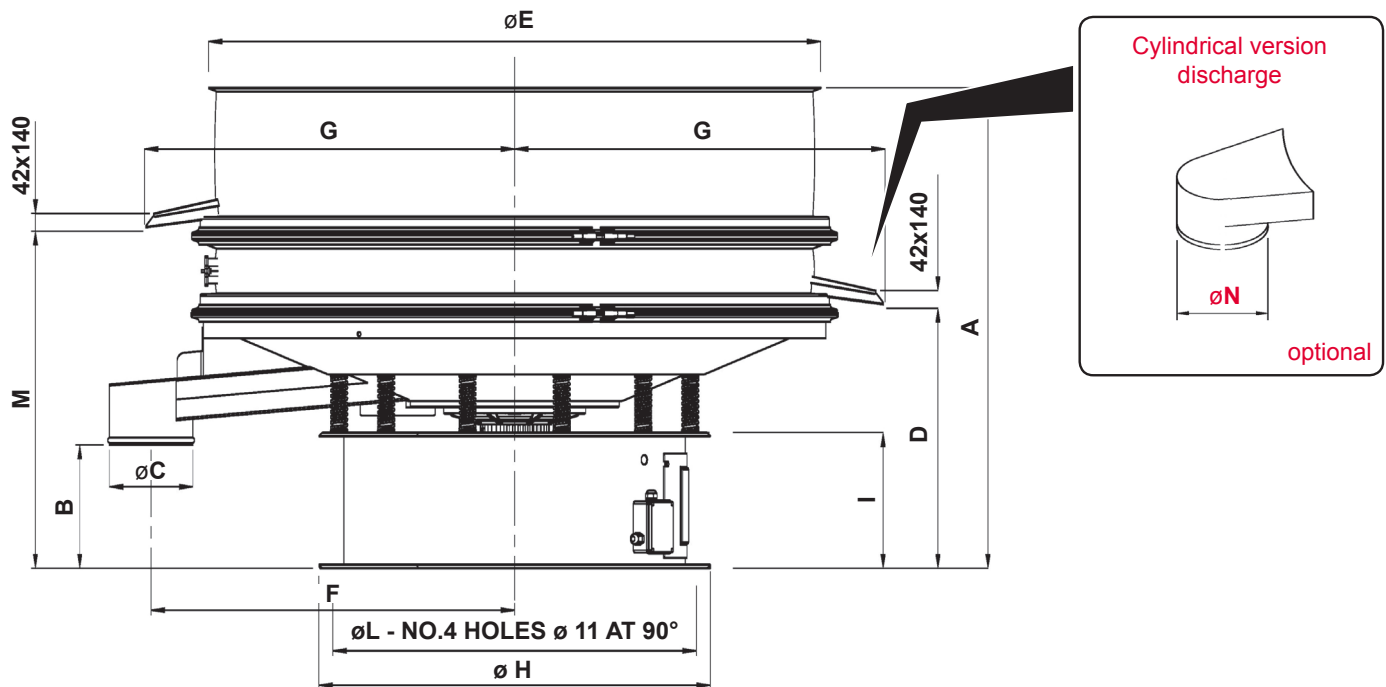

Mod./Size	A	B	ϕC	D	ϕE	F	G	ϕH	I	ϕL	M	ϕN
900 2/X	970	298	101.6	526	911	525	608	741	315	680	679	160
1200 2/X	1049	319	139.7	571	1125	587	715	741	315	680	705	160
1500 2/X	1262	406	200	733	1465	870	889	937	380	870	418	200

USE

- Screening of ceramic casting slips

ACCESSORIES AND VERSIONS

- Quick-coupling diffuser, protected against incrustations

The information is approximate - The guaranteed values are released by Vibrotech s.r.l. on request-It is forbidden to reproduce the document even partially.